

# SUN SBS Series


BI-DIRECTIONAL INVERTER • PURE SINE WAVE •  
 With PWM Solar Controller



## Feature

- Bi-Directional inverter with stabilizer technology
- Advance microprocessor control
- Wide input voltage range 145-265Vac
- Output pure sine wave 220V ±2%
- Output isolation transformer
- High output efficiency >98%(AVR mode)
- Intelligent battery management(ABM)
- Fast transfer time(4ms)
- Full protection Under/over voltage, Overload, short circuit, Low battery, Over charge, Over-temperature and Fault
- Compatible with generators
- Support Solar home backup
- Selection mode EPS (AC & Batt) and Inverter (PV & Batt)
- Maximum charge current (Max.30A)
- USB/RS232 port communication and software monitoring (option)
- CE, EN62040-1, EN62040-2, TIS.1291-2545 certificated
- ISO9001:2008, ISO14001:2004 certified manufacture


### Home Backup Power System(HS)

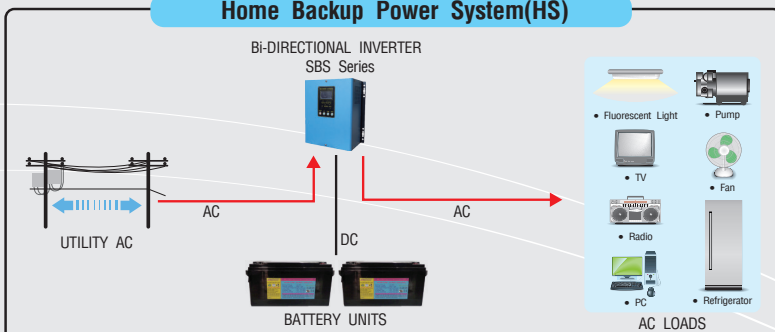

#### HS solutions

1. HS-300W    2. HS-500W    3. HS-800W    4. HS-1000W


### Hybrid Home Backup Power System(HHS)

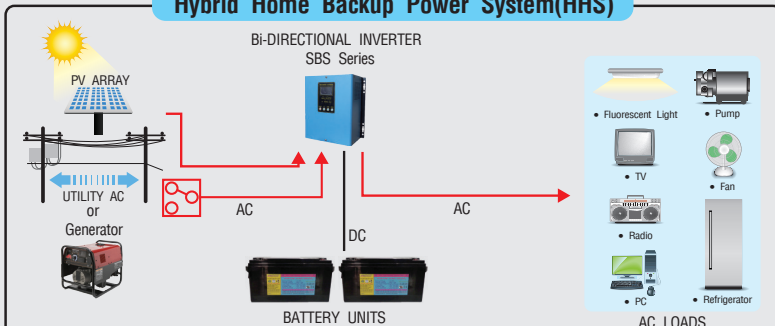

#### HHS solutions

1. HHS-300W    2. HHS-500W    3. HHS-800W    4. HHS-1000W


### Solar Home Backup Power System(SHS)

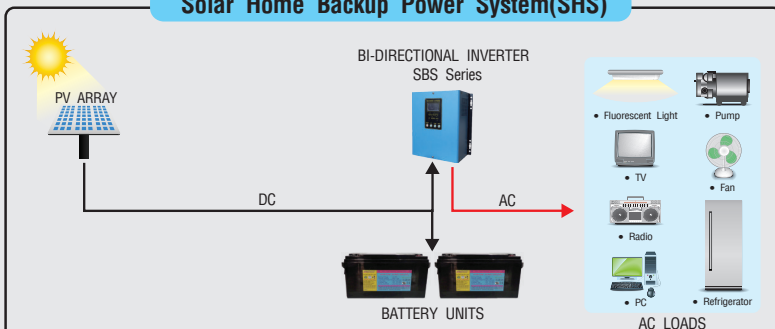


#### SHS solutions

1. SHS-300W    2. SHS-500W    3. SHS-800W    4. SHS-1000W

## LCD display

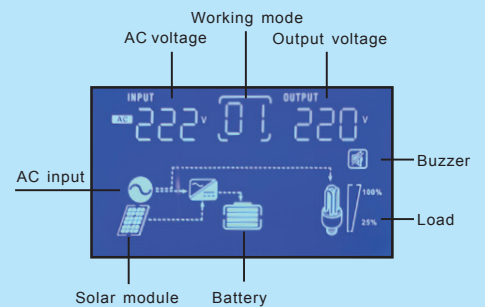

## Battery mode

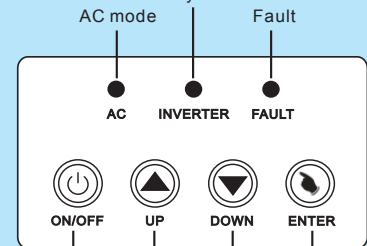

Turn on or turn off    Up    Down    Function



# SUN SBS Series

BI-DIRECTIONAL INVERTER • PURE SINE WAVE •  
 With PWM Solar Controller

## SPECIFICATION

Model		SBS-300	SBS-500	SBS-800	SBS-1000	SBS-1200
CAPACITY		300VA/300W	500VA/500W	800VA/800W	1000VA/1000W	1200VA/1200W
	Control and technology	Microprocessor control, Bi-direction inverter with stabilizer function technology				
INPUT	input voltage	220V (145-265VAC)				
	Input frequency	50Hz $\pm$ 10%/60Hz option				
OUTPUT	Output voltage(stabilizer mode)	220V $\pm$ 10%/ 230V option				
	Output voltage(inverter mode)	220V $\pm$ 1%/ 230V option				
	Frequency	Synchronize AC input, 50Hz $\pm$ 0.1%(Inverter mode)/60Hz option				
	Output waveform	Pure sine wave				
	Efficiency	More than 98% Stabilizer mode, more than 85% inverter mode				
	Harmonic distortion (THDv)	Less than 5% linear load				
	Transient response	$\pm$ 10% maximum voltage deviation at 100% step load				
	Crest factor	3:1				
	Transfer time	4-10 ms				
	Overload capability	110% load for 3min, >150% load for 1sec then automatic shutdown				
BATTERY	Battery type	SLA Sealed Lead Acid(maintenance free) rechargeable, Dip-cycle				
	Voltage	12Vdc	12Vdc	12Vdc/24Vdc	12Vdc/24Vdc	12Vdc/24Vdc
	Charge current	10A	10A	10/20A	10/20A	10/20A
SURGE PROTECTION	Standard energy	UL recognized surge protection to standard 1449				
	I peak	220 joules(510 joules option)(2microsec wave form 8kA(8/20microsec wave form)				
DISPLAY & ALARM	LCD display	Input voltage, Output voltage, Frequency, %load, Overload, %battery, Charging/discharge battery, Operate status auto, stabilizer(AVR), silence alarm and Fault				
	Audible alarm	Main failure(Over/under voltage), Overload, Low battery, Over-temperature and system fault				
SOLAR CONTROL	Nominal voltage	12	12	12/24	12/24	12/24
	Maximum voltage	22	22	22/45	22/45	22/45
	Maximum current	20A	20A	20/50A	20/50A	20/50A
	PWM Range Voltage	12~22VDC		17~22 / 30~45VDC		
	Maximum Efficiency	>90%				
	Standby Power Consumption	<2W				
OTHER	Feature	AC EPS Mode, Solar mode, Battery Type(AGM, GEL, OPzV), DC start (AC start without battery are option)				
	Input	AC:NEMA 5-15P-1.8metre(AC terminal is option), AC circuit breaker reset-able				
	Outlet	2pcs Universal plug(National plug and terminal are option)				
	Communication	Option USB/RS232 port communication and Software monitoring				
	Acoustic noise	Less than 40dBA				
ENVIRONMENT	Temperature	0-50°C				
	Humidity	0-95%(non condensing)				
PHYSICAL	Dimension(mm) WxDxH	290x255x120				
	Weight(kg)	5.8	6.3	10.8	12.5	13.0
	Design regulation	TIS.1291-2545, CE, EN62040-1, EN62040-2, EN50091-1, EN50091-2, EN50022 classA				

Specification only for reference. Subject to change without prior notice.

Chuphotic.BRO-56.SUN SB Series 300-1200.Rev1.00/2018

### บริษัท ฟูฟอทิก จำกัด

949 หมู่ 9 ต.ลำไทรเหนือ อ.เมืองสมุทรปราการ จ.สมุทรปราการ 10270

โทรศัพท์: 02 186 3010 แฟกซ์: 02 186 3018-9

www.chuphotic.com

E-mail: ups@chuphotic.com

ตัวแทนจำหน่าย :